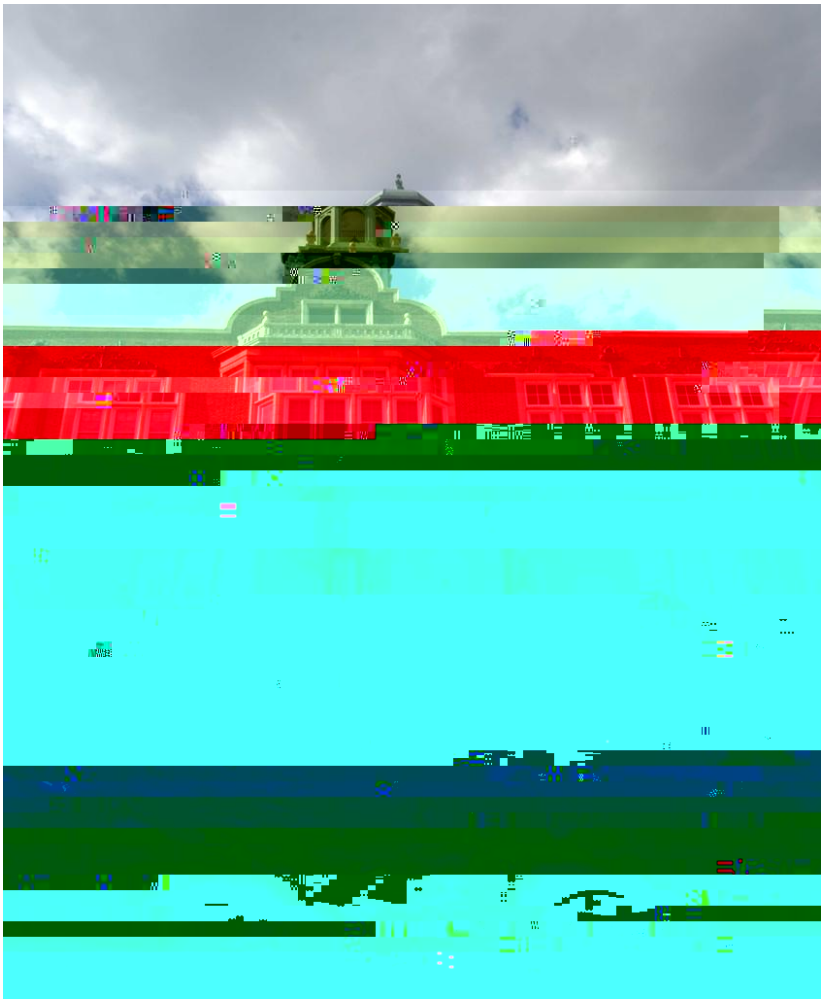

ENVS 491
Senior Seminar
Fall 2009

Rachel Brauer
David Bullis
Devin Byrne
Amanda Deering
Lisa Duckett
Don Griswold
Timothy Herndon
David Hinson
Mary Howard
Joshua Johnson
Kevin Kelly
Ryan McDonald
John Pond III
Malinda Ross
Bryce Selby
Alice Stearns
Elizabeth Sylvia
Michelle Townsel
Gary Wilkins

Forward

The Environmental Science and Studies (ESS) Senior Seminar class is taken by students who are completing their academic major and getting ready to graduate. The course consists of a semester long project. The course objective is for the students to bring to the project the knowledge, skills and abilities

INTRODUCTION

2008 that sets the goals and timetables for achieving legislative implementation (MDCCC 2008), Maryland expects to reach the goals set forth by the GHG Reduction Act (Maryland 2009a).

Towson University is doing its part to help the Nation and the State gain fossil fuel independence and reduce GHG emissions. In 2007, 7 8 ¶ V S U H V L G H Q W Robert Caret, signed the American College & University Presidents ¶ & O L P D W H Commitment (ACUPCC) pledging Towson University to carbon neutrality by 2050. The ACUPCC focus is not just on organizing colleges and universities in reducing GHG emissions, but also to encourage research and edT1Jcation about environmental issues and solutions (ACUPCC 2009). In accordance with the provisions of ACUPCC, Towson University commissioned a Greenhouse Gas Inventory conducted by ARAMARK Higher EdJcation during the 2007/2008 years. In October, 2009 Towson University released its Carbon Action Plan (CAP), required by ACUPCC, to set the guidelines by which the campus will reach carbon neutrality (ACUPCC 2009).

7 K H U H V X O W V R I W K H 7 8 ¶ V GHG inventory indicated that 28% of campus carbon emissions were from transportation; of this, 3% was prodT1JcedT1 by the University Fleet. In spite of this small percentage, we were asked by TU ¶ V) O H H W 0 D Q D J H P H Q W W R I L Q Y H V W L J D W H Z D \ V L Q Z K L F K W K H) O H H W F D Q E H L P S U R Y H G D Q G H Y D O X D W H in terms of its overall efficiency. While the Fleet is not a major source of GHG, overall reduction will help bring the University towards its carbon neutral goal.

We present our findings in the following document. It is obvious that the task of GHG reduction E \ W K H) O H H W L V Q R W W U L Y L D O R U V L P S O H W R U H V R O Y H , W D S carbon footprint will depend on technologies and policies that are still under development.

CURRENT STATE OF THE FLEET

Harry Hughes, Physical Plant Director for Towson University, requested that a ten-year plan be G H Y H O R S H G W R I D F L O L W D W H 7 R Z V R Q 8 Q L Y H U V L W \ ¶ V) O H H W W U D needed. The fleet can be broken down into five sub-fleets: Police vehicles, Transportation vehicles (buses mostly for on-campus use), Fleet vehicles (sedans and vans mostly for off-campus use), Maintenance vehicles, and Landscape vehicles. Within these various sub-fleets there are about 70 different models of vehicles, allocated among

approximately 40 different departments (Table 1). Mr. Hughes supplied general information about the current state of the Fleet, and a tentative budget that ultimately limits options.

7KH GDWD DQG LQIRUPDWLRQ XVHG WR DQDO\]H 7RZVRQ 8QL

Towson University Fleet Roster for 2009, obtained with the assistance of Mr. Hughes. Vehicle age and total mileage data were used to determine the average annual miles per Fleet vehicle. The roster also provided corresponding model types that allowed us to infer proportionality of usage among vehicle types in each department.

and to [redacted] mileage. This relatively low mileage might reflect the restricted on-campus use of some of the vehicl[redacted]

[redacted] order to address the needs and wants, both practically and economically, T R Z V R Q 8 Q L Y H U V L W \ Fleet [redacted] remain within the constraints of a budget. We were asked to work within a ten-year plan that includ[redacted] budget to be used toward redesigning only the Maintenance, Landscape, and Fleet vehicles in Towso[redacted]niversity ¶ V) O H H W The base budget we were given to work with for the purpose of the project was n[redacted] exceed $100,000 for the year 2010, with a potential 2-4% budget increase following 2010. We were a[redacted]allowed to consider an additional $80,000 over the ten-year period which is available for modif[redacted]on of vehicles, and $75,000 with a 1-3% annual increase which is available for vehicle and infrast[redacted]ure maintenance.

[redacted]egulations governing the purchasing and replacing of vehicles are outlined in the State of Maryl[redacted] Policies and Procedures for Vehicle Fleet Management manual of 2005. This document is based [redacted]he Federal Energy Policy Act of 1992 (EPAct of 1992) that describes what agencies are involv[redacted]n vehicle purchasing, the parameters that must be met for a vehicle to be replaced, and the state fueling[redacted]cations and requirements. This document dictates Towso Q 8 Q L Y H U V L W \ ¶ V) O H H W F R P S vehicl[redacted]rchasing and replacing must be done in accordance with P D Q X D O ¶ V requirements.

Table [redacted]he components of the Towson University's Fleet vehicle that we were asked to examine

[redacted]p-fleet	# Vehicles	Mean Year	Mean Mileage
Fleet/Pool	20+	2004	40,979
Maintenance*	[redacted]		

purchased, provides guidelines and determines procedures for vehicle replacement. , Q D G G L W L R Q ³ 7 K H White B R R N ´ J R Y H U Q V should be refueled and which fuel type(s) are to be used. The main goal of the EPAct of 1992 was to L P S U R Y H W K H Q D W L R Q ¶ V H Q H U J \ H I I L F L H Q F \ D foreign fuels (EPAct 1992).

Acquisition and Replacement of Towson University Vehicles

The Department of Budget and Management (DBM) develops specifications for each class of vehicles that an agency of the state might wish to purchase during a given year (DBM 2005). These specifications are then sent to the Board of Public Works for approval (DBM 2005). Upon approval, the Department of General Services (DGS) receives bids from dealers for vehicles that fill the specification requirements, and then vehicles are purchased through the most competitive bidder (Ruley 2009). All vehicles purchased by Towson University must be purchased through the state contracts negotiated by DGS, unless there are no vehicles under contract which are capable of fulfilling the U Q L Y H U V L W \ ¶ V Q H H G All vehicle purchases must be approved by DBM (Ruley 2009).

According to the Policies and Procedures for Vehicle Fleet Management (DBM 2005), a vehicle may only be replaced if it meets one of these requirements:

- Must have at least 100,000 miles.
- Must be at least ten years old and

Should a fleet apply for and receive an alternative compliance waiver, a covered fleet must meet the respective petroleum reduction requirements that are established by the waiver (EPAct 2005). Failure to meet the requirements of the waiver will result in a revocation of the waiver and potential fines for the cover

inefficiency (DOE 2008a). Much of the energy from the fuel mixture is lost as heat (DOE 2008a). Likewise, the environmental cost associated with combustion engines is sometimes overlooked. Combustion engines utilize fossil fuels which releases greenhouse gases (GHG) and other toxic gases that are harmful to the environment. The polluting nature, dwindling fuel reserves, and lower comparative efficiency of internal combustion engines may limit their usefulness as an engine type in the future.

The Four Stroke Cycle

The basic four stroke cycle of an internal combustion engine is comprised of four steps, or strokes: An intake stroke, a compression stroke, a combustion stroke, and an exhaust stroke (Brain 2000a). The

injected directly into the cylinder, where it immediately ignites (Ristinen and Kraushaar 2006). The higher compression of a diesel engine enables it to be roughly 5% more efficient than a gasoline engine in converting chemical energy into mechanical energy

$30,000 (Electropaedia 2009). Lithium-ion batteries outperform lead-acid and NiMH systems in energy density, cycle life and quick charge time, but are a relatively new technology, making them prohibitively expensive. Although the perfect battery may not yet exist, it is predicted that the rising demand of cheaper and better performing battery technology for portable electronic devices, hybrids, and electric cars will rapidly propel research and reduce costs in the near future (Electropaedia 2009).

Hybrid Vehicles

Hybrid vehicles combine the technology of the electric motor and the internal combustion engine. However, the electric motor in a hybrid vehicle is a bit different from the all electric vehicle. In this case there is also a generator in the vehicle, like the one shown in Figure 2. The generator transfers energy from the battery to the motor or vice versa (DOE 2009b). When braking, the generator converts mechanical energy into

Fuel Cells

Fuel cells are a novel concept in power generation; they are neither a battery nor a combustion system. They are their own unique form of power generation. Fuel cells may differ in the types of fuel combinations they use, but the way they work is generally very similar. An individual fuel cell consists of an electrolyte sandwiched between an anode and a cathode (DOE 2008a). Bi-polar plates cover the outside of the anode and cathode, serving as gas distributors and curr

carbonate, and solid oxide fuel cells are all used as either a solid or liquid electrolyte and are mainly used for stationary power generators (DOE 2009d).

Viability of Fuel Cells

of regular gasoline. This 13% margin clearly indicates that some engines are better designed to burn E85 than others.

To better understand the discrepancy in mileage of different engines burning E85, one must understand that energy density is not the only characteristic that determines a fuel ¶ ability to power an automo E L O H $ I X H O ¶ V R F W D Q H U D W L Q J G H W H U P L Q H V W K H W H P S H U octane rating, the higher the ignition temperature. Higher octane fuels are required in high compression sport engines; these high compression engines would cause low octane fuels to ignite prematurely E H F D X V H R I W K H H [W U H P H O \ K L J K S U H V V X U H V W K D W D U H F R Q W D Regular gasoline has an octane rating of 84, compared to the 101-105 rating of E85 (Roberts 2008).

The high octane rating of E85 allows this fuel to be used in a higher compression engine; such an engine can increase the efficiency of converting chemical energy to mechanical energy (Roberts 2008). Therefore, with a higher octane fuel a smaller, high compression engine could replace a larger standard engine with no noticeable loss of power. Unlike regular gasoline, E85 has the ability to burn more efficiently in higher compression engines, potentially making up for its relatively low energy density. These attributes are summed up in Table 2.

Table 2:

Thus, a dedicated E Y H K L F O H Z R X O G E H I D U P R U H H I I L F L H Q W + R Z H Y H U nature of the FFV that reduces its efficiency.

High compression engines are

DFVs may appeal to the consumer who is interested in running their vehicle on a cleaner alternative fuel source without being range-limited due to a lack of alternative fuel refilling stations. Likewise, fleet managers interested in extending the life of their vehicles may find certain DFVs attractive. For instance, multiple dual-fuel conversion companies claim that the lower combustion temperature and low level of contaminants in propane can lead to increased engine life (CNGInterstate 2009, Yugo-Tech N.D.).

Fuel Sources: Petroleum Based Fuels

Crude petroleum is the raw material from which fossil fuels are derived. This petroleum is often trapped in layers of impermeable rock, and is accessed through drilling the rock and pumping it out (Ophardt 2003). Once the oil has been collected, different petroleum based substances are separated by fractional distillation, which essentially heats the oil to the separation

rising. The convenience factor allows gasoline to maintain its stronghold as top transportation fuel, as widespread infrastructure and fueling stations have been available for decades.

The fluctuation in gasoline price per gallon can be attributed to the dynamics of supply and demand. Some sectors of American culture have had a renewed attraction to public transportation and reliance on personal mobility (walking and/or biking) which has shown a negligible reduction on the demand for gasoline (Root 1996). Unless a new, more reliable source of fuel becomes readily accessible to the public, there is little expectation for gasoline to show a significant drop in price (CBO 2008). Since gasoline is the primary fuel source in automobiles, this causes additional costs on the transportation sector.

The production processes and the vehicular combustion of gasoline emit harmful carbon emissions and other GHGs (methane, nitrous oxide, hydrofluorocarbons) (EPA 2005a, EPA 2009a,). Studies suggest that our climate change crisis has been directly linked to the rising output and accumulation of carbon dioxide (CO_2) in the atmosphere (IPCC 2005, UCSD 2002), suggesting that gasoline and other petroleum-based fuels contribute significantly to this escalating climate issue. This is an issue especially for the transportation sector, which is the second highest CO_2 producing sector, and the single largest consumer of petroleum (see Figure 4) (EPA 2009a).

Figure 4: Emissions from fossil fuels consumed by various sectors (EPA 200

In 2008 alone, the United States consumed an estimated 137.8 billion gallons of gasoline, the equivalent of approximately 377,534,246 gallons consumed per day (Naidenko 2009). According to rough calculations, that would mean Americans contribute around 3,349,696.14 metric tons of CO_2 emissions per day (EPA 2005a). As a result, the EPA has taken initiative to decrease CO_2 emissions, which includes an increased focus on areas with the worst smog and pollution levels (EPA 2009b). A 1995 amendment to the Clean Air Act requires such problematic localities (including Baltimore) to implement the use of reformulated gasoline (EPA 2009b). Reformulated gasoline contains oxygen-rich chemicals for cleaner burning (Gustafson 2008). The Maryland Clean Car Act of 2007 will also help curb CO_2 emissions as Maryland will be adopting California's (MDOE 2009). However, these are short-term solutions to a larger problem.

Gasoline is still the most widely available transportation fuel, and comparatively cheap relative to renewable sources of energy. Although U.S. crude oil production is expected to increase from 2009 to 2010 for the first time since 1991, the price at the pump is also expected to rise (EIA 2009d). This will likely cause increased interest in hybrid vehicles, and even conservative estimates are predicting hybrid

to optimize ignition (DOE 2003). This major improvement resulted in a more complete burning of the fuel; more power delivered, lowered emissions, and increased fuel economy (DOE 2003).

Both gasoline and non-vegetable diesel are petroleum-based fossil fuels, with their own inherent strengths and weaknesses. As a fuel, diesel is a more complex material, containing more carbon atoms, making it a heavier, denser fuel than gasoline (DOE 2009f). Diesel and gasoline also differ in that diesel has a higher boiling point and freezing point than gasoline (DOE 2009f). Arguably, the most important difference between gasoline and diesel fuels in regards to their functionality in engines is the combustion ratio at which they explode. Diesel fuel will self-ignite when it reaches a certain level of compression, eliminating the need for the spark needed in gasoline engines (DOE 2009f). Diesel also has a higher energy density than gasoline, containing about 155 MJ/gallon, compared with 132 MJ/gallon (Brain 2000c). It is important to note that in a modern diese

is in high demand in countries with rapidly developing infrastructure, like China and the U.S. In addition, diesel engines are substantially more powerful than gasoline, and generally about 30-35% more fuel efficient (FuelEconomy.gov 2009d).

The other costs associated with diesel fuels are the environmental impacts of its use and the comparative cost of engine maintenance. Environmentally, diesel has its ups and downs. Diesel releases more CO_2 per gallon of fuel consumed than gasoline (22.2 lbs/gal in diesel versus 19.4 lbs/gal in gasoline) (EPA 2005b). Therefore, although more CO_2 is released per gallon, the increased mileage efficiency of diesel results in less CO_2 released per mile traveled (EPA 2005c).

Compressed Natural Gas/Liquid Natural Gas as a Fuel

Natural gas is not a single pure material; it is a mixture of gases and can be comprised of up to 90% methane (NaturalGas.org 2004a). The remaining portion of the gas is made up of many other hydrocarbons, including propane and butane. The geological conditions surrounding the formation of natural gas are very similar to that of oil. Over tens of thousands of years, decaying organic matter is squeezed beneath E D U W K ¶ V V X U fr om inside Earth, along with the pressure from its surface, breaks down the carbons to form natural gas or oil. Natural gas and oil can form at the same location. The varying temperatures and pressures determine whether oil or natural gas is to be formed. The natural gas L V W U D S S H G X Q G H U J U R X Q G E \ D Q L P S H U P H D E O H U R F N O D \ H U W recovered from the earth by simply drilling through the impermeable rock layer and collecting it as it escapes through the fissure in the rock (NaturalGas.org 2004a).

Natural gas was first used to heat homes in Britain in 1785 (Naturalgas.org 2004b). It was not until the 1920s that a pipeline structure was first considered for the U.S. There was a boom in natural gas infrastructure throughout the 1960s because of an increase in building technology during and after World War II (Naturalgas.org 2004b). Natural gas was first explored as an alternative fuel for vehicles during the gas crisis of the 1960s and 1970s, and the infrastructure for this fuel has been growing ever since. An increased demand for natural gas over the last 40 years has led to natural gas pipelines running under

make it easier to extract the gas (NGVA 2006). There are numerous pipelines that carry natural gas all over the country (EIA 2009b

infrastructure is already in place, CNG as a vehicle fuel is a very good alternative to conventional gasoline and diesel.

Filling stations for natural gas (both CNG and LNG) are very similar to conventional gasoline stations. The driver can just pull up to the station, connect the nozzle to the filling cap and refuel

, $ 1 * 9) U R P W K H F R Q V X P H U ¶ V perspective, CNG is currently not a viable option. Currently, a citizen cannot pull up to a gas station in the area and fill up their car with natural gas. Home fueling units are available, but this limits the range of the vehicle since it must return home to fuel (Consumer Energy Center 2009). These household units ti H L Q W R W K H K R P H ¶ V natural gas line used for heating and cooking, and compress it to be pumped into a vehicle. But even if a CNG fueled vehicle is still a good choice, another problem arises; the CNG Honda Civic is the only one vehicle available to consumers that runs on natural gas (DOE 2009g). Currently, this car is only available to California residents because the state has CNG infrastructure available to the public.

The current overall lack of infrastructure and vehicle availability makes the future for natural gas as a vehicle fuel bleak. At this point and time, it seems unlikely that it will become the next fuel for America. It seems natural gas will be only used by commercial and public transportation as a cleaner ³ T X L F N I L [´ alternative to the overuse of gasoline. However, if public demand grows leading to an increase in infrastructure, natural gas could prove to be a viable short term alternative.

Propane as a Fuel:

Propane, a by-product of oil refining and natural gas production, is a very economical and clean

is

campus could be converted. This would increase the engine life, lower repair costs, and drastically lower harmful emissions.

FUEL SOURCE: BIOMASS FUELS

Corn-based Ethanol (Starch Ethanol)

All resources have a price, and corn-based ethanol is no exception. As a component of the most popular alternative fuel in the U.S., ethanol blended fuel is expensive in comparison to traditional gasoline. Assuming that corn prices are around $2.00 per bushel, E85 corn-based ethanol costs $1.00-1.06 (2005 dollars) per gallon to produce, compared to an average conventional gasoline price of $2.27 per gallon in 2005 (EIA 2007). Moreover, the farmers who are producing ethanol cannot afford to burn it to make it; therefore, energy from petroleum is not saved because it is used during the production of corn to produce ethanol (Segelken 2001). A liter of E85 has an energy equivalency of 0.80 liters of gasoline

Agricultural land used for corn production erodes land surfaces faster than it can repair itself; therefore, soil erosion is a harmful byproduct of the production of corn-based ethanol, causing an increase in nutrient and sediment pollution in waterways (National Academies 2007). Excess nutrient and sediment pollution from agricultural run-off can also lead to anoxic and anaerobic aquatic conditions, disrupting ecosystem interactions (Rayloff 2004).

In terms of total energy required and environmental costs of corn-based ethanol, it takes 70% more energy to produce ethanol from corn than is actually derived from burning the ethanol produced; thus, the overall energy input is greater than the energy output, leaving a net energy loss (Segelken 2001). The burning of coal, oil, and natural gas to harvest and distill corn would also contribute to air pollution (Knufken 2009).

Cellulosic Ethanol

Cellulosic ethanol is a type of biofuel derived from the fermentation of lignocellulosic material from plant matter. In most cases, highly productive plants such as switchgrass, *Panicum virgatum*, and *Miscanthus giganteus*, are selected for the production of cellulosic ethanol; however, wood chips and lawn clippings are also popular materials to use (DOE 2009i). Producing cellulosic ethanol costs about $1.80 per gallon gasoline equivalent (GGE) compared to E85 corn-based ethanol, which was produced in 2005 for about $1.00 per GGE (Energy and Climate 2009, EIA 2007). This alternative fuel will retail for $2.70 per GGE (Energy and Climate 2009). These prices have been adjusted to reflect the gasoline equivalent since one gallon of ethanol contains approximately two-thirds of the energy of a gallon of gasoline (EIA 2007).

Lignocellulosic materials such as switchgrass are much more efficient than corn in terms of the amount of energy that is returned per hectare (Biello 2008). A scientist working for the USDA agricultural research service reported that yields from switchgrass fields would deliver an average of 13.1 megajoules (MJ) of energy from ethanol for every 1 MJ of energy from petroleum consumed in the production and harvesting (Biello 2008).

Figure 5 shows retail fuel prices for gasoline and many alternative fuels over the past nine years. From the graph we see that corn based ethanol, in the form of E85, comes close to matching gasoline prices between December 2003 and April 2004, but never dropped below the

gas made up of carbon monoxide (CO), CO_2, and hydrogen (DOE 2009i). The gas is then fermented using either a catalytic reactor or a microorganism bacterium Z K L F K ³ L Q J H V W V ´ R U ³ F R Q V X P H V ´ J ethanol and water (DOE 2009i).

The difficulty with cellulosic ethanol lies in the breaking down of the lignocellulosic materials into sugars (BlueFire Ethanol 2009). Lignocellulosic material is very resistant to decomposition and the extraction of the sugars may be challenging, which may lead to a longer processing time (BlueFire Ethanol 2009). More recently, however, concentrated acid hydrolysis technology is being used to convert cellulosic waste material to ethanol which will help speed up the production process while helping cities manage landfill waste (BlueFire Ethanol 2009). BlueFire, a company on the leading edge of this technology was recently awarded funding f5(, 7( )] TJETBTu)13(09)] TJET4(ch)] TJETBT1 0 0 7( )]1(ol)-4(og)/F25(r)M

Cellulosic refineries can als

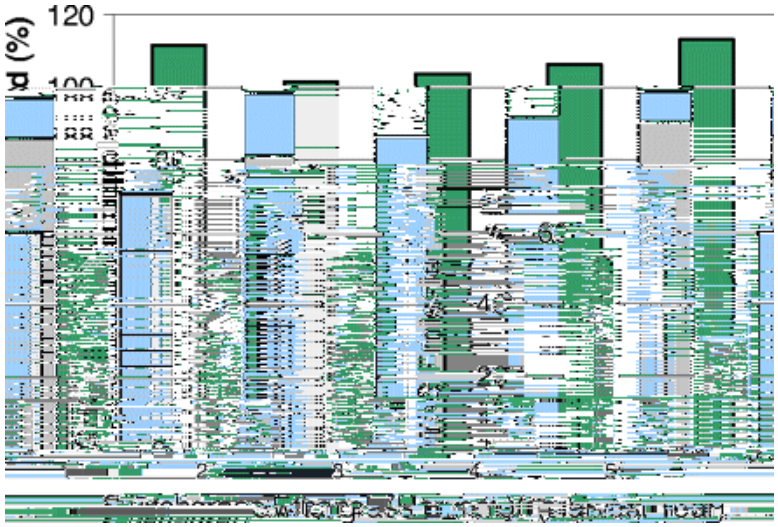

based ethanol (E100) (76,000 BTU/gallon) (Gevo, Inc. 2009). Vehicles running on green gasoline will be more powerful than those that run on E85, a current issue with flex fuel vehicles. Green gasoline has significantly lower GHG emissions than conventional gasoline: 15,000 grams (g) CO_2/million BTU of fuel and 98,000 g CO_2/million BTU of fuel respectively (Gevo, Inc. 2009). Since green gasoline is derived from plant materials it is important to note that CO_2 is removed from the atmosphere as the plant is growing which will further impact calculated emissions.

It is important to note that the relatively new development of green gasoline means that the costs of production and distribution, once the technology is established, are not known. Gevo Inc. predicts that the production cost of green gasoline is expected to be slightly more expensive ($/gallon) than ethanol but less expensive than conventional gasoline (Gevo Inc.2009).

Not only can green gasoline be used in automotive vehicles, but studies suggest that it may also be used as an alternative to conventional jet fuels (Gevo, Inc. 2009). While experimenting with production and utilization of biomass hydrocarbons, Gevo Inc. has successfully synthesized and tested a jet fuel blend-stock (Gevo, Inc. 2009). This is a major advancement because most alternative fuels have not been found to be as powerful as conventional fuels (Ebert 2008). Since jets require high energy output from their fuel, the fact that green gasoline has the ability to be used as a jet fuel shows that it has as much power as conventional gasoline. Using green gasoline instead of jet fuel could have significant

Increasing the use of biodiesel has now become the better environmental and economical decision in some states. North Dakota uses about 165 million gallons of diesel fuel per year. Of those 165 million gallons, about 85 million gallons are used for farm equipment in crop production. In 2001, about 2.1 million acres of soybeans were produced in North Dakota, with an average yield of about 33 bushels per acre (Hofman 2003). Soybeans contain about 18% oil and the average oil production could be around 49 gallons per acre (Hofman 2003). If this oil were converted to biodiesel, more than 100 million gallons of fuel could be produced per year (total consumption (Hofman 2003). Soybean based diesel fuel could be used to fuel all farm equipment in the state of North Dakota. Other oil crops grown in the state could be used to produce additional fuel. For every BTU of energy used to produce the soybean crop and process the oil, about 3.3 BTUs are produced as fuel (Hofman 2003).

electricity to run the motor of the car (EIA 2008). In this case, the vehicle is effectively an electric vehicle with hydrogen as the source of electricity. Alternatively, hydrogen gas can be used to fuel an internal combustion engine. As a fuel, hydrogen has many advantages for the environment when compared to other non-renewable fuels.

Hydrogen gas can be obtained from a variety of different hydrogen containing compounds. As the smallest and lightest element, once hydrogen gas is formed, it rises up into the atmosphere, leaving almost no pure hydrogen gas on Earth (EIA 2008). The environmental costs associated with the production of hydrogen gas vary, depending on the extraction source of the gas. In the most common method of extracting hydrogen gas, hydrogen containing compounds such as coal, petroleum or natural gas are put

go through a circuit around the membrane, which in turn creates the electricity (DOE 2009j). Oxygen (from the air) enters through the opposite side of the fuel cell, where it passes through a cathode creating oxygen ions (DOE 2009j). These oxygen ions react with the hydrogen ions to create water vapor and heat (EIA 2008). The water vapor leaves the car through the exhaust (Larminie 2003).

In an internal combustion engine run by hydrogen fuel, either hydrogen gas or liquid is fueled to WKH HQJLQH 2QFH WKH K\GURJHQ HQWHUV WKH HQJLQH¶V F\OL reaction with oxygen (DOE 2001). Hydrogen has a low ignition energy, or high range of flammability.

lowering the cost of hydrogen gas to $2.00-$3.00/gge by 2015, making it competitive with gasoline (CaFCP 2009).

All things considered, the future of hydrogen as a fuel source appears viable. It has the potential to be both clean and renewable, two characteristics that make it very attractive for everyone. Although the technology is not presently advanced, it is likely that the use of this fuel will only grow with time.

Electricity

Electric vehicles (EV), which qualify as an alternative fuel under EPAct, have a lot of potential as an alternative fuel vehicle (EPAct 1992). $OWKRXJK (9¶V DUH RIWHQ WLWOHG ³]HUR majority of the electricity that would power these vehicles in the Baltimore region is derived from coal SRZHU SODQWV (OHFWULFLW\ ZRXOG KDYH WR FRPH IURP UHQHZ alternative. ,Q RUGHU WR PDNH (9¶V D YLDEOH DOWHUQDWLYH WR JDV would be necessary to support a transition from gasoline to electric fueled vehicles. (9¶V in their current state are not able to compete with their gasoline competitors due to their limited range and the long charge times. Depending on the type of battery found in the EV, a full recharge may take anywhere from four to eight hours (CA ARB 2003). Because an (9¶V battery must be recharged or replaced upon running out of energy, the main concern with electric vehicles is related to problems of where and how to charge the vehicles.

(9¶V can be charged at any home outlet, but due to their limited range, public charging stations or drive through battery exchange stations would also be necessary for EVs to be a viable and reliable form of transportation. In only a few minutes time, public charging stations could provide EVs with a substantial amount of additional range, depen(s)9(t)-4(oeG)9(p187.94 Tm[BTfem[(n)-2( )cCoMCID 0>BDC BT1 0 0 1)-3

installation of each public charging station (MGE 2009). The research will make sure that the technology LV ³VDIH UHOLDEOH DIIRUGDEOH DQG HQYLURQPHQWDOO\ UHVS

With a battery exchange station, on the other hand, a mechanical arm would go under the vehicle and switch out the old battery for a new, fully charged battery (Greenemeier 2009). It is estimated that a battery exchange station would cost approximately $500,000 to build. Additional costs would be involved in housing for all of the batteries, the batteries themselves, and the recharging of used batteries that would be needed to fit every make and model of electric vehicle (Vlasic 2009). Optimally, batteries would be owned and leased by exchange companies. A service like this would effectively spread the cost RI WKH EDWWHU\ RXW RYHU WLPH DQG PDNH WKH HOHFWULF YHKLFOH¶V RZQHUVKLS FRVW UDWKHU working the consumer to purchase the battery up front. Currently, it is unclear who will end up paying for the new infrastructure, which is a main hurdle for the transition toward any alternative fuel source (Greenemeier 2009).

To fully understand the differences in efficiency between a gasoline engine and an electric car, one must consider the efficiency with which chemical energy is converted into useful work; in this case, the turning of the FDU¶V ZKHHOV $OWKRXJK JDVROLQH KDV D UHODWLYH combustion engines are quite inefficient at converting the chemical energy of the fuel into work. Even in modern combustion engines, energy losses from heat, friction, and idling result in conversion efficiencies of roughly 15% (FuelEconomy.gov 2009b). That is to say, of the 33.70 KWh (kilowatt hours) of available energy stored within one gallon of regular gasoline, only 5.06 KWh are transferred to the wheels (FuelEconomy.gov 2009b). Table 3 is a comparison of gasoline and electric vehicles:

Table 3:

Whether or not EV technology is mature enough for large scale production is debatable. The typical primary family car in America is expected to have both the capability to travel long distances and to refuel quickly. Therefore, most current HOHFWULF YHKLFOHV ZLOO QRW µVDWLVI\¶ However, the couple hundred mile limited range of an EV built with currently available technology could satisfy the demands of a university fleet. Batteries remain prohibitively expensive for auto manufacturers, but some of these costs would be recovered by the consumer through reduced energy rates vs. gasoline costs (Table 3). Additionally, the eOHFWULF PRWRU¶V PLQLPDO PDLQWHQDQFH F gasoline engine would further enhance savings. However, presently no auto manufacturer is willing to produce (9¶ on a large enough scale to make their purchase price remotely competitive with gasoline fueled autos.

The Electric Vehicle Paradigm

Electricity can be generated by a range of different fuels, most of which emit carbon dioxide; Figure 7 displays the most significant sources of electricity production in the US. Much like hydrogen vehicles, because EVs do not have measurable emissions themselves, it might appear as if they have no direct impact on the composition of the atmosphere. The environmental impact of the vehicle ¶use ultimately depends on the impact of the source of electricity, and therefore, when selecting a power source for an EV, it may seem logical to choose one of the options with the fewest carbon dioxide emissions associated with it. However, there are certain logistical and environmental issues that are involved that may complicate such a decision. Renewable fuel sources are very appealing due to their lack of emissions (EIA 2009e). However, there are other environmental impacts that need to be explored before a choice is made (EIA 2009e). Environmental impacts come in a variety of forms; some, such as greenhouse gas emissions, are more direct, while others come in the form of reduction of ecosystem

services, which are very hard to evaluate economically and therefore are included in the economic equations (EIA 2009e).

Mercury, arsenic, lead, cadmium and trace amounts of uranium are also emitted by coal power plants (UoCS 2009b). A coal plant generates an average of 170 tons of mercury each year. Comparatively, 1/70th of a teaspoon of mercury in a 25 acre lake is enough to make fish unsafe to eat (UoCS 2009b). The average coal power plant also produces 225 pounds of arsenic which can travel vast distances through the air before depositing in nearby ponds and streams (UoCS 2009b). The EPA has set the standard for arsenic in drinking water at 10 parts per billion to protect humans from cancer (EPA 2006).

Extraction and Transportation: Mountain top removal strips 60 percent of US coal from the surface (UoCS 2009c). The process of mountain top removal involves soils from mountain tops being removed to uncover coal. The subsequent waste soils are then dumped into the valleys below, literally filling the valleys and streams to the brim (McQuaid 2009). The EPA estimates that an area the size of Delaware will have been deforested and 1,200 miles of stream destroyed by 2013 due to mountaintop removal in the Appalachian Mountains (McQuaid 2009).

After extraction, the coal must then be transported to the power plants. Locomotive transportation of coal is responsible for nearly 1 million tons of nitrogen oxide and 52,000 tons of particulates each year (UoCS 2009c). Coal is typically stored at power plants in uncovered piles, allowing lung-irritating particulates to be blown onto nearby houses and lawns (UoCS 2009c). In addition, runoff from coal storage leads to acid leaching in waterways surrounding coal power plants (Cook & Fritz 2002). Acid leaching is detrimental to streams because it changes the water chemistry by increasing aluminum concentrations to levels where aluminum becomes toxic to stream biota (Likens 2007).

Hydropower

Hydropower is the most commonly used renewable energy source in the world (SPE 2009). It is responsible for producing 6% of the world's energy and in the US, hydropower is the single largest source of electricity from a renewable energy source (SPE 2009). Hydropower is electrical power generated

through the movement of water (SPE 2009). It is captured from waterfalls, river currents, and waterways (SPE 2009). In hydro-electric dams, water is directed through a pipe (penstock), where the force and pressure exerted by the water pushes the blades of a turbine, spinning a generator (EIA 2009g). The electricity from the generator may then be transmitted through long distance power lines for public use in distant areas (EIA 2009g). Other methods of harnessing hydropower include the use of the force of river currents (water diverted to canals or pipes), tidal fences (vertical axis underwater turbines), and waves (focusin

Solar Power

Solar power currently accounts for less than 1% of the electricity produced in the US (Galbraith 2009). The two major methods of generating electricity through solar power are concentrating solar power (DOE 2008e) and photovoltaic cells 3 9 & ¶ DOE 2006). Currently, the cost of electricity from solar power is expensive, with electric from 3 9 & ¶ V ting four times as much as electricity generated from coal (Galbraith 2009).

Concentrating Solar Power The concentrating solar power method of producing electricity uses mirrors to reflect sunlight onto a central receiver (see figure 8) (DOE 2008e). These receivers then turn the light energy into heat which can be used to produce steam or run a heat engine to drive generators (DOE 2008e). Once steam is produced, the system is similar to any system that uses energy to produce steam. Concentrating solar power systems can be affected by a lack of sunlight but can be combined with thermal storage systems to remain productive during cloudy days (DOE 2008f). This reliance on the sun makes the southwestern United States and other sunbelt areas worldwide attractive locations to place concentrating solar power systems, where they are able to achieve V R P H R I W K H Z R U O G ¶ V K L J K H solar-to-G electric efficiencies (DOE 2008f).

Figure 8: Concentrating solar power systems using reflectors to concentrate solar energy onto a receiver. This energy is then used to turn liquid into steam which drives a generator for creating electricity (DOE 2008g).

Proper management of concentrating solar power systems is necessary in order to minimize their environmental impact. The concentrated rays of sunlight can kill birds and insects if they fly in the path of the concentrated rays found between the mirrors and the receiver (EIA 2009i). Some of the fluids used to transfer heat are potentially hazardous to the environment and require proper disposal (EIA 2009i). Additionally, concentrating solar power systems require two times the amount of water as a coal or nuclear plant (Glennon 2009). Concentrating solar power systems are most effective in southwestern states where water is scarce and the surrounding habitats are sensitive to the little amounts of water DYDLODEOH WKLV DPSOLILHV WKH HQYLURQPHQWDO HIIHFWV RI The amount of water used could be reduced by 80-90% by using air-cooling techniques. However, this process would reduce the thermal efficiency of the systems (Glennon 2009).

Photovoltaic Cells (PVCs): 3 9 & ¶V use the sun to excite electrons into a direct current flow (see figure 9) (FSEC 2007a). Because the electrical grid uses an alternating current, electricity from photovoltaic arrays must be passed through a power inverter in order to be used on a grid (FSEC 2007b). Much like concentrating solar power systems, the functionality of 3 9 & ¶V depends on the availability of solar rays. In order to remain useful overnight or during cloudy conditions, batteries are usually used with photovoltaic arrays that store extra energy produced during the day for use during these adverse conditions (FSEC 2007c).

Figure 9: Sunlight excites electrons in a photovoltaic cell to create a current (FSEC 2007a).

3 9 & ¶ ¡ V almost no water, giving them an environmental advantage over concentrating solar power systems (Glennon 2009). However, solvents, alcohols, and other toxic materials are used in the manufacturing process of photovoltaic cells, producing small amounts of waste materials (EIA 2009i). 3 9 & ¶ e V uire 8-12 square meters of surface area per kilowatt when installed in the most efficient array, making surface area availability a limiting factor for 3 9 & ¶ F S EC 2007d).

Nuclear Power

Nuclear energy is produced through the nuclear fission, or splitting, of an atom to produce steam from heat (Alternate Energy Sources N.D,.U.S. NRC 2009). Uranium is a viable choice for fuel because it is a heavier atom, making it easier to split (U.S. NRC 2009). Uranium is commonly found in rocks and is mined in the western US and many other locations around the world (EIA 2009j). Approximately one-fifth of the electricity in the US is generated from nuclear power and most of that uranium is imported (EIA 2009j). The type of uranium that is used in the fission process is U-235 and is relatively rare, with an estimated global supply to meet the world ¶ demands for approximately eighty years (EIA 2009j; WNA 2009b). The total cost of producing nuclear electricity from nuclear power is half a cent per kilowatt hour (WNA 2009c). Unfortunately, the estimated eighty year time frame of U-235

been well researched and has a life cycle that can be full circle if the fuel is reprocessed (see

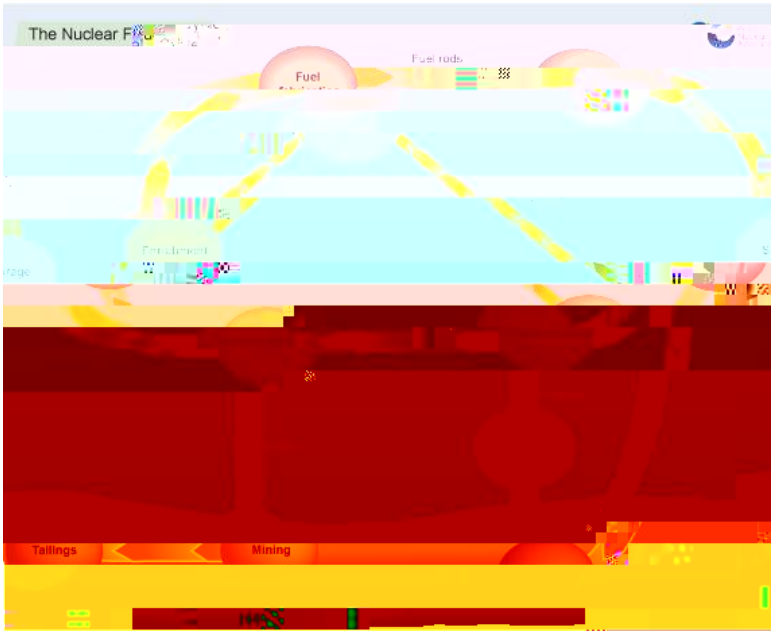

Likewise, because nuclear power produces a marginal amount of CO_2, it could also be used to create electricity to charge batteries for electric cars (Silverman 2008).

Alternative Electric Fuels ±A Summary

Rule et al. (2009) conducted a lifecycle CO_2 analysis of alternative energy sources in order to compare the emissions of geothermal, hydroelectric, tidal, and wind energy. Lifecycle CO_2 emissions are expressed in grams CO_2/kWh and include energy from construction, regular maintenance and decommissioning of the plant. Production of concrete for hydroelectric dams, for example, can require enormous amounts of energy. At 1.8g CO_2/kWh, tidal generation proved to have the lowest CO_2 emissions, followed by wind power at 3.0g CO_2/kWh (Rule et al.t2009). Hydroelectric plants were found to have 4.6g CO_2 and geothermal, 5.6g CO_2/kWh. When compared to energy derived from coal, which emits roughly 1,100g CO_2/kWh, the emissions from each of these alternative energy sources are negligible (EIA 2009f).

In terms of available electricity sources, the Energy Information Administration (EIA) publishes WKH ³(OHFWULF 3RZHU 0RQWKO\ ´ the EIA reports the most recent energy data including preliminary sets of figures that are not complete yet. Also included are the price and usage trends. This publication could be a very useful tool when purchasing and/or using electric vehicles by providing the most up-to-date electricity data because it gives the fleet manager an up to date status report on many

University vehicles purchased must be environmentally friendly, but they also must remain economically feasible. H

Driver Education Programs: Fuel-smart educational programs and their promise of increased sustainability are quickly becoming a more prevalent aspect of fleet management. Studies show drivers who are more aware of strategies that can increase their fuel efficiency save about 20-30% on gas (Sustainable Community Enterprises 2009). Estimated cost savings come to about $500 per driver (Sustainable Community Enterprises 2009). Fleets that have incorporated educational courses have reported that the implementation of fuel-efficient driving technique programs reduce wear on vehicles (Sustainable Community Enterprises 2009). Although this type of educational program appears costly, long-term gains such as improved safety, reduced maintenance needs, and reduced gas expenses make them worthwhile. Collaborating with local fleet operations, such as Baltimore County, might provide for an effective exchange of information, ideas, past successes, and future plans. Robert Majewski (2009), from Baltimore County Office of Budget and Finance, Vehicles Operations and Maintenance, presented to us the components of a newly incorporated fuel-smart education program recently adopted by the County. Some of these fuel-smart ideas and our findings relative to the anticipated savings from these actions include:

- Avoid idling vehicles for extended time periods ±studies have shown that idling vehicles for an hour consumes the equivalent of a gallon of gas (LiveViewGPS 2009)
- Reduce speeds ±drivers could save up to 14% on gas expenses simply by lowering their speeds (LiveViewGPS 2009)
- Avoid rapid starts and stops
- Route Optimization ±reducing the miles driven by a fraction can accumulate savings on gas expense and increase net profits (LiveViewGPS 2009)
- Minimize weight and heavy loads in vehicles

Maximize Fuel Efficiency: By reducing a Y H K L F O H ¶ V Z,Hul Jkt W E) may increase by 4-8% and reduce the amount of strain on the engine (InterAcademy Council 2009). Vehicles get more miles per gallon of gasoline without added weight producing drag (InterAcademy Council 2009). Replacing heavy cargo structures with lighter-weight materials will lighten a vehicle load. For example, the Dodge Sprinter vehicles in Towson University ¶ V P D L Q W H Q D Q F H) leet carry heavy workbenches; these

structures could be replaced with lighter materials. Some light-weight materials include high-strength steel, aluminum, magnesium and fiber-reinforced plastics (InterAcademy Council 2009).

Installing devices such as an Auto Meter will allow drivers to directly monitor their fuel and driving performance. The Auto Meter is a relatively recent product designed for the average driver seeking to reduce gas consumption and related expenses (Work Truck 2009). The meter is a visual, quantitative gauge that measures fuel economy based on driving style (Work Truck 2009). It is a relatively easy system to install with straightforward gauges to read (Work Truck 2009). The meter (see Figure 11) displays both a real-time fuel consumption (miles per gallon) gauge and a color-coded eco-graph, coded in red, yellow, and green (green being most fuel efficient) (Work Truck 2009). Reported claims of a 37% savings on fuel expense with a heightened awareness in personal fuel economy have been made (Work Truck 2009).

General and Proactive Maintenance and Measures. General maintenance considerations for better fuel efficiency include routine tire checks (i.e., pressure and tread-wear), oil changes, no-leak fuel system, and U R X W L Q H H Q J L Q H F D U H 7 K H D L U S U H V V X U H L Q D W L U H L V F U X F

of 0.3% per accurate pounds per square inch (psi) for each vehicle to be closer to its optimal tire pressure (USDE 2009). Routine oil changes can directly affect the need for and frequency of routine engine care (AA1Car 2009). Oil loses its viscosity over extended use which results in oil sludge and potential engine-damage (AA1Car 2009). However, the interval between needed oil changes is variable depending on the oil type, fuel type, driving style, distance, and frequency of vehicle use.

An energy-efficient vehicle-to-task assignment program would help establish a more synchronous fleet operation. Having large, heavy-powered vehicles assigned only for heavy-duty loads, or carpooling to maintenance tasks at common locations will reduce fuel consumption, vehicle emissions, and traffic. Also, rotating vehicle usage within the Fleet can increase vehicle life expectancy. Simple, non-labor intensive tasks (i.e. routine building inspections) should avoid the use of a larger, heavy-duty vehicle when a smaller, four-cylinder vehicle would be adequate.

Long Term Recommendations

Over the course of the next decade vehicle technologies will continue to improve, fuel options are going to increase, and changes in policy will occur. The ability of the Towson University Fleet to become more sustainable and efficient over the long run must rely upon these technological advancements, and how these advancements and potential policy changes shape the vehicle and fuel markets.

Diesel and Biodiesel Diesel and biodiesel are currently the most viable alternative fuel sources on the market. Their current availability in the automobile industry, accessibility to the public sector, and their environmental benefit (cleaner more efficient burning), make them our top choice for moving Towson University ¶V)OHHW WRZDUG Biodiesel is a clean burning alternative fuel to petroleum based diesel fuel (PC. Bio. 2009). Although slight modifications may be necessary for a vehicle to be able to operate on biodiesel, as mentioned earlier, we believe the benefits outweigh the costs when the switch is made to this fuel.

Biodiesel can be purchased through DGS contracts and fuel tanks could be kept on campus to refill Fleet vehicles. Many of the heavy duty campus vehicles may not be traveling great distances, so having a filling station on campus would decrease fuel usage. If a vehicle were off campus and running out of biodiesel, it would still have the ability to be refilled with ULSD to make it back to campus; diesel engines have the capability to run on both petroleum based diesel and biodiesel (NBB 2009a). As biodiesel becomes more accessible, there is a possibility that surrounding counties may follow and install the biodiesel-pumping infrastructure at their filling stations. Having biodiesel pumps available off campus will increase the range of campus vehicles that run on biodiesel fuel.

Electric Vehicles Future solutions also lie in electric vehicles. There are several advantages of electric vehicles that will meet the needs of the Fleet and reduce heavy-duty vehicular traffic on campus. First, electric vehicles have no direct measurable emissions, which would be a major asset to the campus and the environment (Fuller 2009). Although fuels are still being burned in plants in order to power the grid, there is greater efficiency in large-scale plant-production of energy versus energy production at an individual level from car engines (Nichols and Akers 2009). Electric vehicles will minimize the number of point source polluters and make the transition to alternatively powered plants more environmentally effective. Second, electric vehicles tend to be lighter and smaller than their fossil fuel powered

A third benefit of electric vehicles is the ready-to-

charge. It may not be necessary to install charging stations on campus if Fleet vehicles draw their power

A few e O H F W U L F Y H K L F O H V K D Y H E H H Q V X F F H V V I X O O \ X V H G E \ T

for on-campus activities only. Future advancements in technology could potentially allow for electric

the alternative fuel vehicle purchase requirements. As a result, Towson University can not apply to meet the vehicle purchase standards through the alternative compliance option unless the University of Maryland Fleet agency chooses to use this method. However, if the alternative compliance option were to be made available to Towson University it may be able to benefit the University and their Fleet.

The Alternative Compliance option is based on reducing petroleum usage rather than purchasing alternatively fueled vehicles (EPAct 2005). This petroleum reduction can be based on a number of different methods and factors, one of which is the use of biodiesel blends that are above the requirements of state law (DOE 2009l). In the state of Maryland this would include biodiesel blends of at least B5 (DOE 2009m). Towson University would also be able to purchase and use hybrid vehicles for their Fleet if the alternative compliance were to become an option. Credit for petroleum reduction can also be obtained by the use of alternative fuels in vehicles that are considered to be exempt by the EPAct of 1992 (DOE 2009m). This would allow the entire Towson University Fleet to ensure that the current EPAct standards are met. However, until the State adopts the alternative compliance method in their version of the EPAct of 1992 standards, the University must continue to purchase 75 percent alternatively fueled vehicles each year (DBM 2005).

There are other options that still exist in terms of meeting the standard compliance. The most efficient and beneficial to the University would be the use of a biodiesel blend of B20. The use of B20 is still covered by most manufacturer warranties (NBB 2009b) and is the minimum blend required to obtain credits for compliance (DOE 2009m). For older vehicles in the Fleet that are out of warranty, it may be possible to use a hieay8s eay of 1992 x0

References

AA1Car. 2009. How Often Should You Change Oil?
http://www.aa1car.com/library/how_often_change_oil.htm (accessed 8 Nov 2009).

> $ & 8 3 & & @ $ P H U L F D Q & R O O H J H D Q G 8 Q L Y H U V L W \ 3 U H V L G H Q W V ¶ & O L P D W H
W K H $ P H U L F D Q & R O O H J H 8 Q L Y H U V L W \ 3 U H V L G H Q W V ¶ & O L P D
http://www.presidentsclimatecommitment.org/about (accessed 28 October 2009).

All About Circuits. 2009. Difference in Motor Types.
http://www.allaboutcircuits.com/vol_2/chpt_13/6.html. (accessed 3 Nov 2009).

Asadullah , M., M.A. Rahman, M.M. Ali, M.S. Rahman, M.A. Motin, M.B. Sultan, M.R. Alam. 2007. Production of bio-oil from fixed bed pyrolysis of bagasse. Fuel 86: 2514-2520.

Alternate Energy Sources. N.D. There Are Advantages of Nuclear Energy as there are Challenge.
http://www.alternate-energy-sources.com/advantages-of-nuclear-energy.html (accessed 8 Nov. 2009)

[AWEA] American Wind Energy Association. 2009. Wind Web Tutorial: Wind Energy Basics.
http://www.awea.org/faq/wwt_basics.html (accessed 8 Nov. 2009).

[BBio.] Baltimore Biodiesel. 2009. Baltimore biodiesel FAQs
http://www.baltimorebiodiesel.org/faqs.php (accessed 12 Nov. 2009)

Biello, David. 2008. Grass Makes Better Ethanol Than Corn Does. Scientific American.
http://www.scientificamerican.com/article.cfm?id=grass-makes-better

[DGS] Maryland Department of General Services. 2009. Active Blanket Purchase Orders. http://dgsweb.dgs.state.md.us/activeBPO/comm_bldgmaterials.html (accessed 6 Nov 2009).

[DOE] United States Department of Energy. N.D. Alternative Fuels. Fueleconomy.gov. http://www.fueleconomy.gov/feg/current.shtml (accessed 9 Nov 2009).

[DOE] United States Department of Energy. 2001. Hydrogen Use in Internal Combustion Engines. http://www1.eere.energy.gov/hydrogenandfuelcells/tech_validation/pdfs/fcm03r0.pdf (accessed 8 Oct 2009)

[DOE] United States Department of Energy. 2003. Freedom CAR & vehicle technologies program. http://www1.eere.energy.gov/vehiclesandfuels/pdfs/basics/jtb_diesel_engine.pdf (accessed 10 Nov 2009).

[DOE] U.S. Department of Energy. 2006. Photovoltaic Basics. http://www1.eere.energy.gov/solar/pv_basics.html (accessed 17 Nov. 2009)

[DOE] United States Department of Energy. 2008a. Hydrogen Fuel Cells Fact Sheet http://www1.eere.energy.gov/hydrogenandfuelcells/pdfs/doe_h2_fuelcell_factsheet.pdf (accessed 4 Nov 2009)

[DOE] United States Department of Energy. 2008b. Fuel Cell Technology Challenges. Fuel Cell Technologies Program. http://www1.eere.energy.gov/hydrogenandfuelcells/fuelcells/fc_challenges.html (accessed 9 Nov 2009).

[DOE] United States Department of Energy. 2008c. Basics. Fuel Cell Technologies Program. http://www1.eere.energy.gov/hydrogenandfuelcells/fuelcells/basics.html (accessed 4 Dec 2009).

[DOE] United States Department of Energy. 2008d. Energy Efficiency and Renewable Energy: What is a propane vehicle? http://www.afdc.energy.gov/ (accessed 18 Oct 2009).

[DOE] U.S. Department of Energy. 2008e. Concentrating Solar Power. http://www1.eere.energy.gov/solar/csp.html (accessed 17 Nov. 2009)

[DOE] U.S. Department of Energy. 2008f. Concentrating Solar Power Basics. http://www1.eere.energy.gov/solar/csp_basics.html (accessed 17 Nov. 2009)

[DOE] U.S. Department of Energy. 2008g. Line3t1 0 0 1 445.63 245.45 Tm[t2001(Sola)-4(>BDC BplMC /P AMCI(N)5(c

EDinformatics. 1999. Alternative Sources of Energy-Oil. http://www.edinformatics.com/math_science/alternative_energy/fossil_fuel/barrel_oil.png (accessed 20 Nov. 2009).

[EIA] Energy

Electropaedia. 2009. Battery Types. http://www.mpoweruk.com/battery_types.htm (accessed 5 Nov 2009).

Energy and Climate. 2009. Cellulosic Ethanol. http://www.energyandclimate.org/cellulosic-ethanol.html (accessed 25 Sept. 2009).

[EPA] Environmental Protection Agency. 2005a. Greenhouse Gas Emissions from a Typical Passenger Vehicle. EPA Emission Facts: Office of Transportation and Air Quality. http://www.epa.gov/OMS/climate/420f05004.pdf (accessed 20 Sept 2009).

[FSEC] Florida Solar Energy Center. 2007b. Types of PV Systems. http://www.fsec.ucf.edu/en/consumer/solar_electricity/basics/types_of_pv.htm (accessed 17 Nov. 2009)

[FSEC] Florida Solar Energy Center. 2007c. How A PV System Works. http://www.fsec.ucf.edu/en/consumer/solar_electricity/basics/how_pv_system_works.htm (accessed 17 Nov. 2009)

[FSEC] Florida Solar Energy Center. 2007d. Pros & Cons of PV. http://www.fsec.ucf.edu/en/consumer/solar_electricity/basics/pros_cons.htm (accessed 17 Nov. 2009)

FuelEconomy.gov. 2009a. Engine Technologies. http://www.fueleconomy.gov/Feg/tech_engine_more.shtml#dfi (accessed 15 Nov 2009).

FuelEconomy.gov. 2009b. 2009 Honda Civic. http://www.fueleconomy.gv/feg/noframes/25870.shtml (accessed 20 Sept 2009).

FuelEconomy.gov. 2009c. Flex-Fuel Vehicles. . http://www.fueleconomy.gov/FEG/atv.shtml (accessed 20 Sept 2009).

FuelEconomy.gov. 2009d. Diesel vehicles. http://www.fueleconomy.gov/feg/di_diesels.shtml

Fuller, John. 2009. What is the History of Electric Cars? http://auto.howstuffworks.com/fuelefficiency/hybrid-technology/history-of-electric-cars.htm (accessed 7 Oct 2009).

Galbraith, Kate. 2009. Solar Energy. The New York Times. http://topics.nytimes.com/top/news/business/energy-environment/solar-energy/index.html (accessed 17 Nov. 2009)

Geology.com. 2009. Marcellus Shale ±Appalachian Basin Natural Gas Play. http://geology.com/articles/marcellus-shale.shtml (accessed 20 Oct 2009).

Gevo, Inc. 2009. Advancing the Era of Renewables: Hydrocarbon Fuels from Plant Biomass. http://www1.eere.energy.gov/biomass/pdfs/Biomass_2009_Adv_Biofuels_II_Glassner.pdf (accessed 28 Sept. 2009).

Giametta, Chuck. 2006. The Consumer Guide to E85 Ethanol Vehicles 2006. HowStuffWorks.com. http://auto.howstuffworks.com/fuel-efficiency/vehicles/the-consumer-guide-to-e85-vehicles.htm (accessed 10 Nov 2009).

Glennon, Robert. 2009. Is Solar Power Dead in the Water?. The New York Times. http://www.washingtonpost.com/wp-dyn/content/article/2009/06/05/AR2009060501988.html (accessed 17 Nov. 2009)

[GM] General Motors. 2009. How fuel cells work. http://www.gm.com/experience/technology/fuel_cells/how_fuel_cells_workT EMC /P ÆMC 6:x.jsp

Knufken, Drea. 2009. Complexities of Corn. Delicious Living.

[MD EA] Maryland Energy Administration. 2009 http://www.energy.state.md.us/ (accessed 10 Oct 2009).

[MDOE] Maryland Department of the Environment 2009. Maryland clean cars program. http://www.mde.state.md.us/Programs/AirPrograms/Mobile_Sources/Clean%20Cars/index.asp (accessed 12 Nov 2009).

Meyers, Robert J. 2008. Before the Committee on Energy and Commerce U.S. House Representatives. Speech, 6 May 2008. http://www.epa.gov/ocirpage/hearings/testimony/110_2007_2008/2008_0506_rjm.pdf (accessed on 9 December 2009).

[MGE] Madison Gas and Electric. 2009. Pilot Program: Electric Vehicle Charging Stations. http://www.mge.com/Images/PDF/Electric/other/ElectricVehicleChargingStations.pdf (accessed 20 Sept 2009).

Monahan, P. 2005. Diesel vs. gasoline. http://www.grinningplanet.com/2005/04-12/diesel-vs-gasoline-article.htm (accessed 20 Sept 2009).

Mouawad, Jad. 2009. The New York Times. Fight Over Shale Gas Drilling Not Over. http://greeninc.blogs.nytimes.com/2009/10/30/fight-over-

Ristinen, Robert and Jack Kraushaar. 2006. Energy and the Environment. New York: John Wiley.

Roberts, Mathew C. 2007. E85 and Fuel Efficiency: An Emperical Analysis of 2007 EPA Test Data. December 2007. Energy Policy 36 (2008). 1233-1235

Root, A. 1996. Cult

Transco Energy. 2009. CNG Conversions. http://www.transecoenergy.com/pages/CNG_Conversions.htm (accessed 11 Oct 2009).

[USDE]. United States Department of Energy. 2009. Tips to Improve your Gas Mileage. http://www.fueleconomy.gov/feg/maintain.shtml (accessed 9 Nov 2009).

[UCSD] University of California, San Diego. 2002. The Rise of CO2 and Warming. Earth Guide http://earthguide.ucsd.edu/globalchange/global_warming/03.html (assessed 4 Oct 2009).

[UoCS] Union of Concerned Scientists. 2009a. Coal vs. Wind. http://www.ucsusa.org/clean_energy/coalvswind/c01.html (accessed 17 Nov 2009)

[UoCS] Union of Concerned Scientists. 2009b. Environmental impacts of coal power: air pollution. http://www.ucsusa.org/clean_energy/coalvswind/c02c.html (accessed 17 Nov. 2009)

[UoCS] Union of Concerned Scientists. 2009c. Environmental impacts of coal power: fuel supply. http://www.ucsusa.org/clean_energy/coalvswind/c02a.html (accessed 17 Nov. 2009)

[U.S. NRC] U.S. Nuclear Regulatory Commission. 2009. What is Nuclear Power? http://www.nrc.gov/reading-rm/basic-ref/students.html (accessed 8 Nov. 2009)

9 O D V L F % L O O L Q J D * O R E D O 3 O D Q I R U & D U & K D U J L Q J 6 W D W L R Q V http://www.nytimes.com/2009/02/09/business/09electric.html (accessed 6 Oct 2009).

: K H H O H U 7 L P R W K \ 9 . 3 & D S -and-trade emissions reduction programs catch on: Md. raises P L O O L R Q V I R U H Q H U J \ S U R J U D P V . The Baltimore Sun. ' H F H P E H U